


PRODUCT FACT SHEET



DULUX[®] LUXAFLOOR[®] ROLLCOAT

The High Solids Epoxy Floor Coating

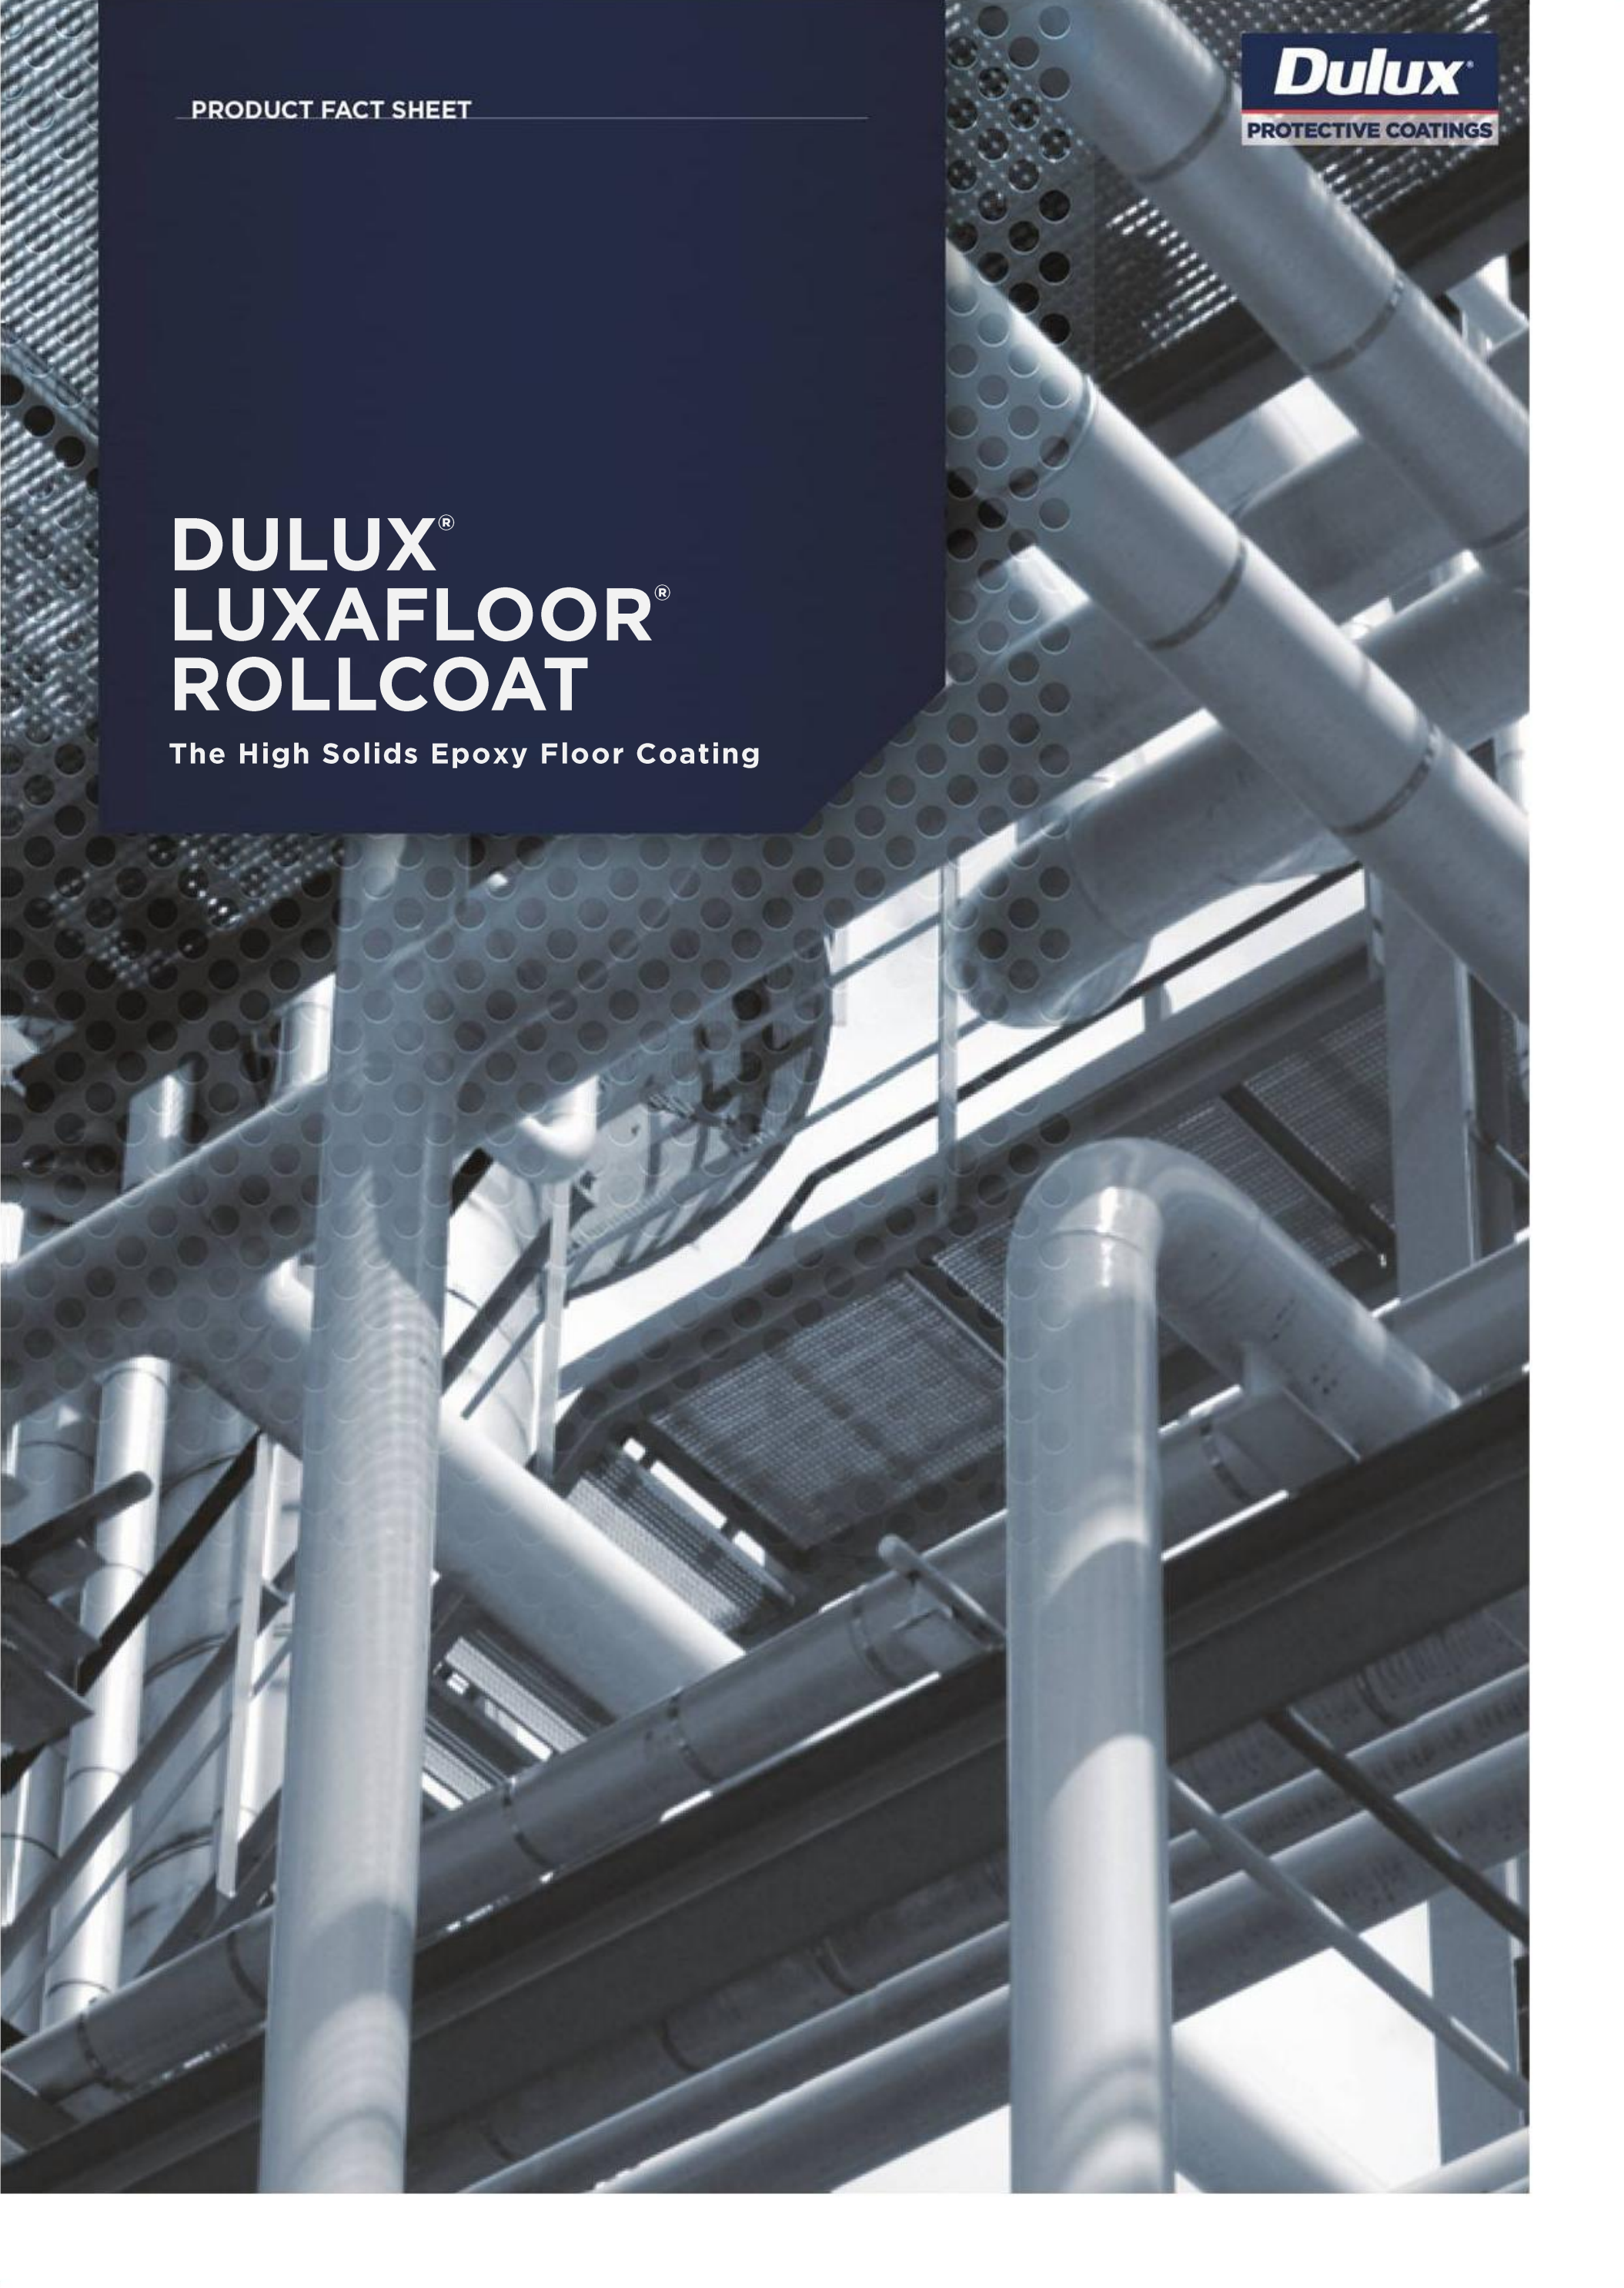

DULUX® LUXAFLOOR® ROLLCOAT

Luxafloor® Rollcoat is a two-pack, high solids epoxy floor coating. Luxafloor® Rollcoat has significantly lower odour than conventional epoxies, thus offering improved indoor air quality. Luxafloor® RollCoat has excellent flow-out on application, and greatly improves the aesthetics and cleanability of concrete floors. Optional slip resistant finishes are possible with Luxafloor® Aggregates.

USES

Luxafloor RollCoat is ideal for use in areas subject to foot and rubber-tired vehicle traffic such as factories, warehouses, car park and garage floors, laboratories, and back of house areas.

FEATURES

- Lower VOC compared with conventional epoxies (~140 g/l).
- Easy to apply by brush, roller, conventional or airless spray
- Standard, Cold Weather and Hot Weather Hardeners available
- Smooth, gloss finish
- Slip resistant with addition of Luxafloor® Aggregates
- Extremely tough and hardwearing
- Excellent chemical resistance
- Standard range of factory packaged colours and tinted colours

BENEFITS

- Cold and Hot Weather Hardeners offer year-round application
- Very easy to clean
- Aesthetically pleasing finish
- Tough and chemical resistant

PERFORMANCE GUIDE

Weatherability	Will chalk on UV exposure
Heat Resistance	Up to 120°C dry heat
Water Resistance	Outstanding. Not for immersion
Abrasion Resistance	Excellent. CS-17 wheels 120 mg/1000 cycles (Taber Abrasion @ 1000g load/wheel)
Solvent Resistance	Very good
Acid Resistance	Excellent resistance to dilute acids
Alkali Resistance	Excellent
Salt Resistance	Excellent
Standards & Tests	AS/NZS 4586 (with Luxafloor Aggregate)

APPLICATION

Brush, roller, conventional spray and airless spray.

