


PRODUCT FACT SHEET

**Dulux**<sup>®</sup>  
PROTECTIVE COATINGS

# DULUX<sup>®</sup> LUXEPOXY<sup>®</sup> FILLER

The Solventless Epoxy Filler

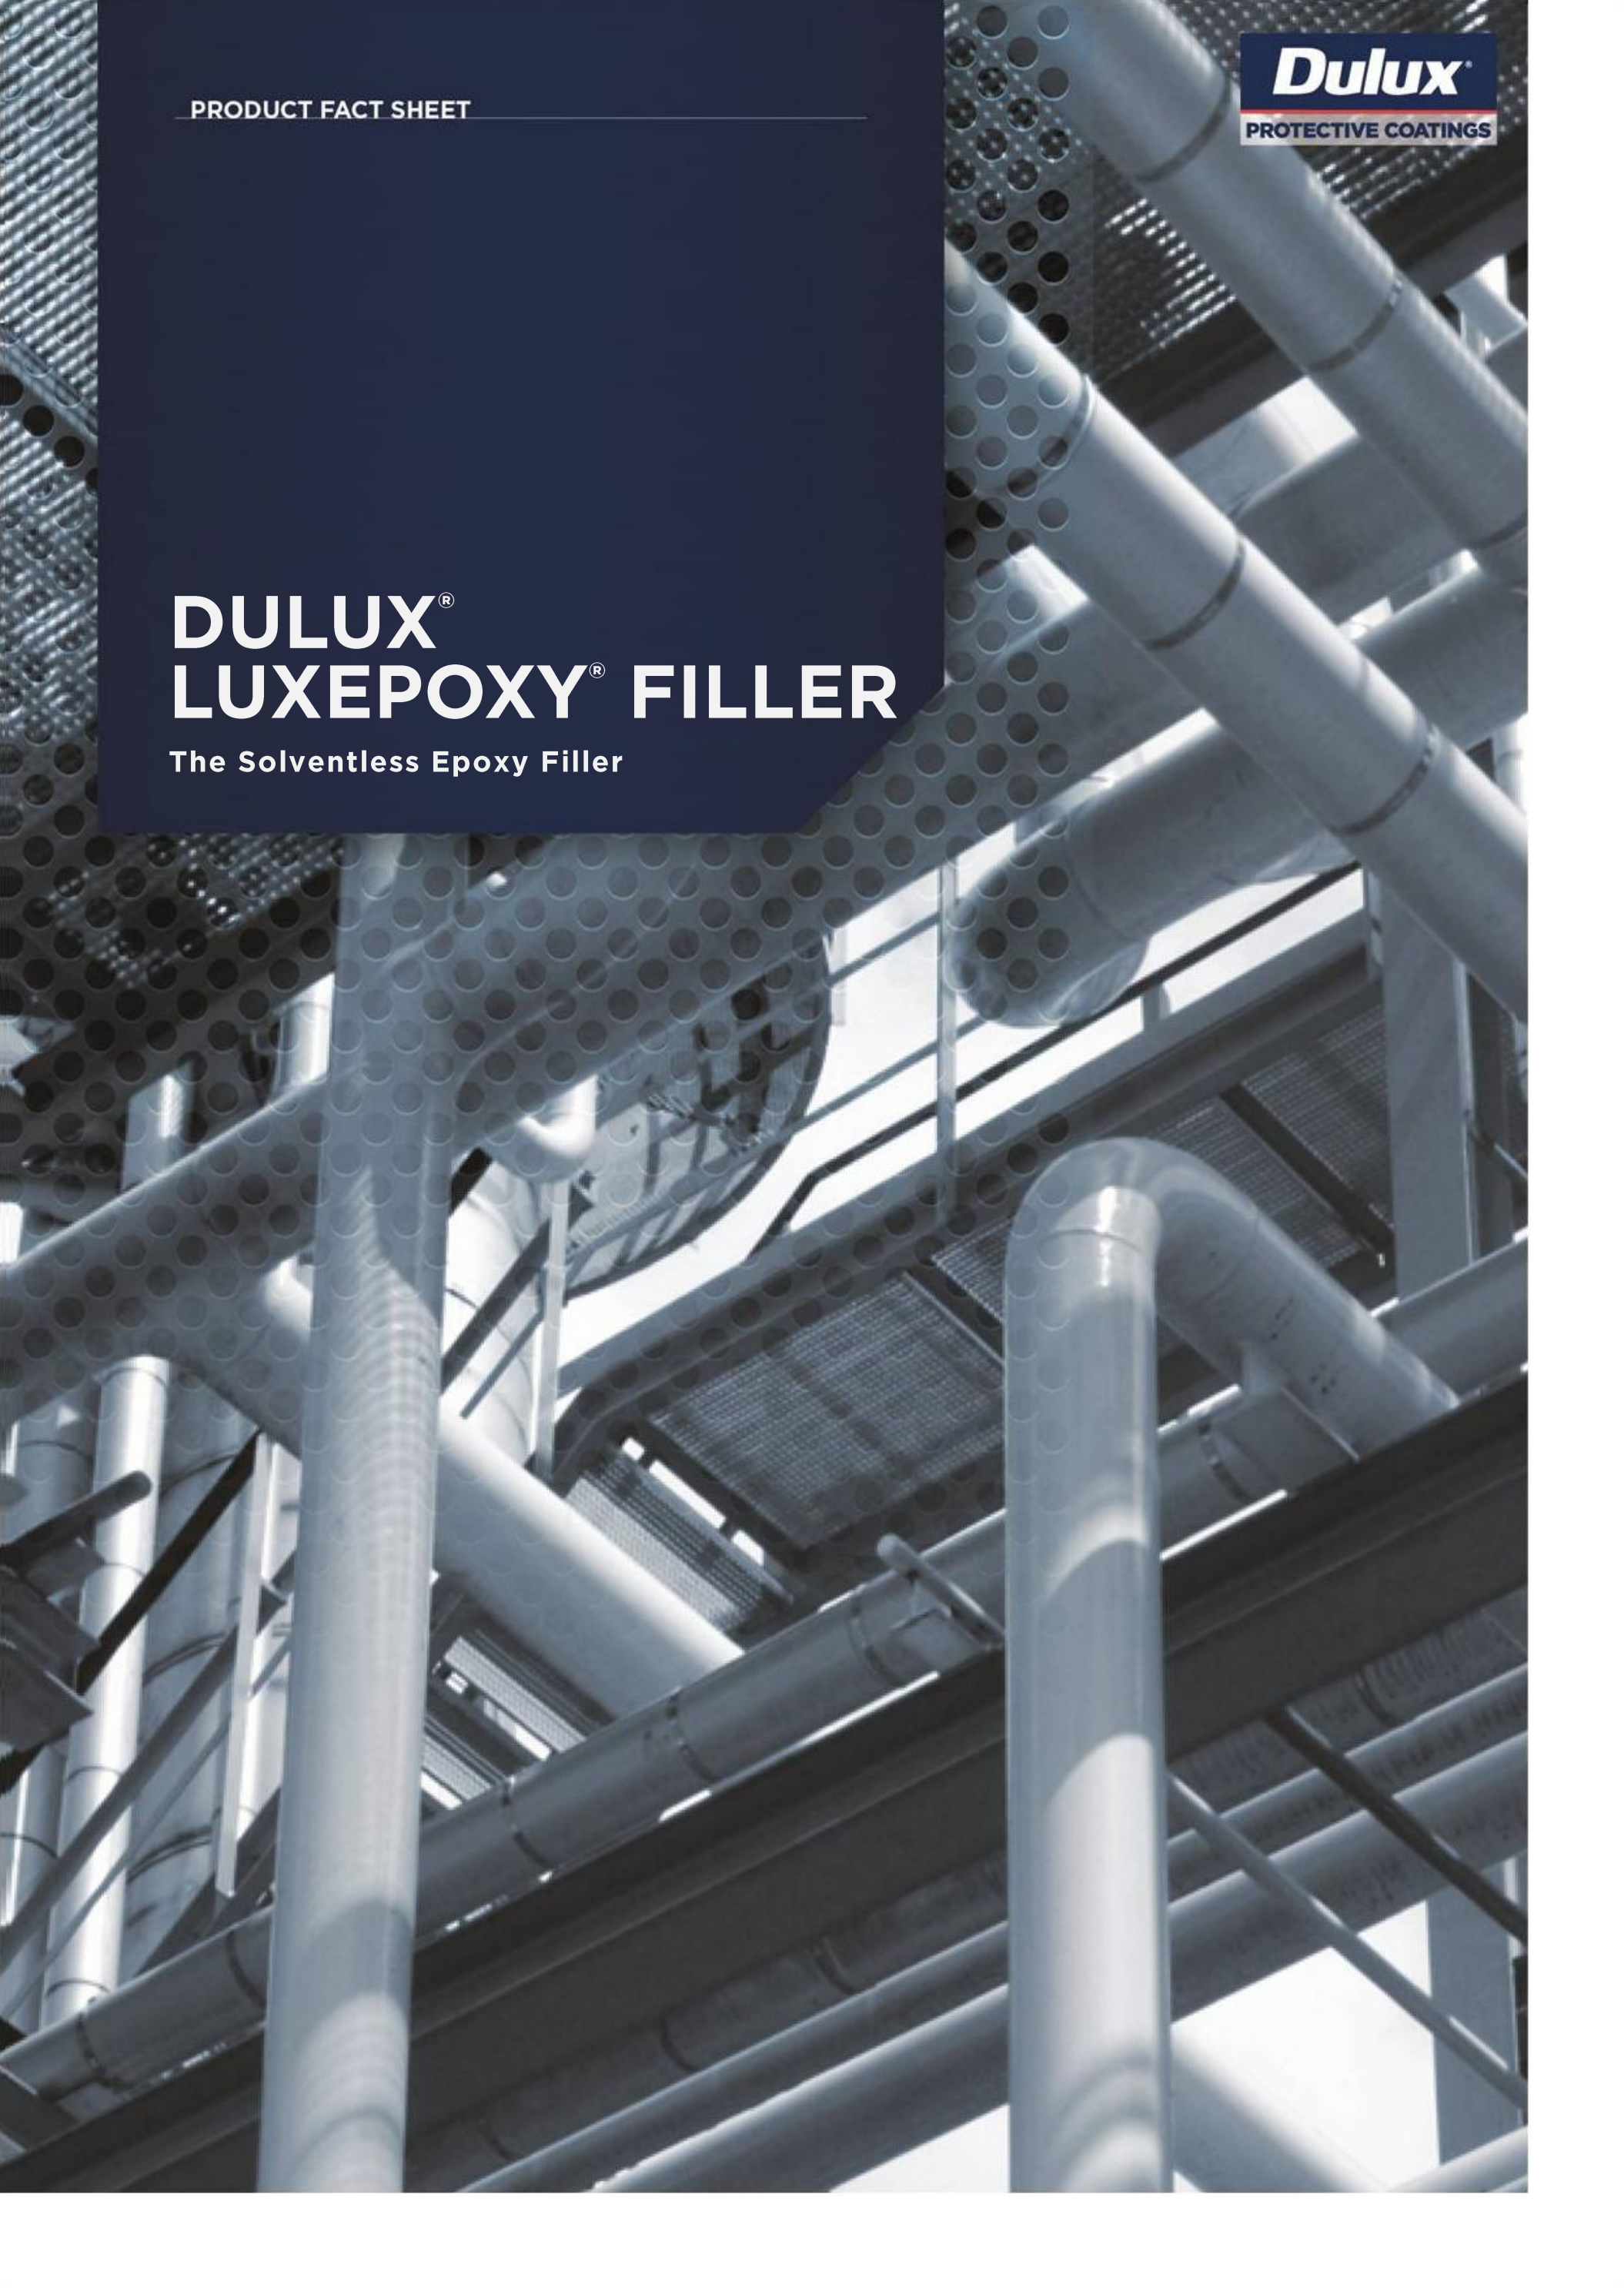

# DULUX® LUXEPOXY® FILLER

Luxepoxy® Filler is a high performance solventless epoxy filler for steel and concrete in chemically aggressive environments. Luxepoxy Filler is also ideal for filling and repairing construction defects such as porous and discontinuous welds, concrete blow holes, and providing a moisture barrier around steel concrete joints. It can also be applied to damp concrete surfaces. Being solventless, Luxepoxy® Filler won't shrink, and can be tooled off to a flush finish.

## USES

Luxepoxy® Filler is suitable for filling and sealing gaps, crevices, or imperfections in and between concrete, steel and other hard surfaces including those in contact with foodstuffs. Luxepoxy® Filler is suitable for immersion in fresh or salt water and conforms to AS 4020 for contact with potable water.

## FEATURES

- Non-shrink and slump resistant to 2-3mm
- Solvent free - zero VOC
- Highly chemical resistant
- Moisture tolerant
- Convenient, easy to use 600 ml cartridge pack
- Suitable for topcoating with approved protective coatings

## BENEFITS

- Easy to mix, fill and tool off
- Fast turn-around for short down times

## PERFORMANCE GUIDE

Weatherability	Will chalk on UV exposure unless topcoated
Heat Resistance	Up to 125°C dry heat
Water Resistance	Excellent resistance to immersion
Abrasion Resistance	Excellent
Solvent Resistance	Resists most solvents
Acid Resistance	Good
Alkali Resistance	Excellent
Salt Resistance	Excellent
Standards & Tests	AS/NZ 3750.5

## APPLICATION

This system requires a special application gun/dispenser available from Dulux Protective Coatings.

