

Product Fact Sheet

# Luxafloor® Express FCF

Fast Cure Coating for Concrete Floors



## Luxafloor® Express FCF

LUXAFLOOR® FCF is a two pack, high performance, fast cure floor coating designed to get assets back into service quickly with very short cure times.

Combining LUXAFLOOR® FCF with LUXAFLOOR® AGGREGATES enables the fast installation of safety compliant slip resistant finishes.

### Features

- Recoat in 2 hours at 25°C
- Fast return to service – full cure 1 day at 25°C
- Long pot life – 8 hours at 25°C
- Isocyanate free
- Excellent gloss & colour retention under UV exposure, making it suitable for interior and exterior application
- Excellent system when paired with Luxafloor Express Primer



### Application

Brush and roller

Product overview – See Product Data Sheet for more information

Volume solids	75% (White)
VOC level	<215 g/L (White)
Recommended dry film thickness (per coat)	75 µm (Spread rate of 10.0 M <sup>2</sup> /L)
Recommended primer	Dulux Luxafloor® Express Primer

### Standard Epoxy Floor Coating with Standard Hardener

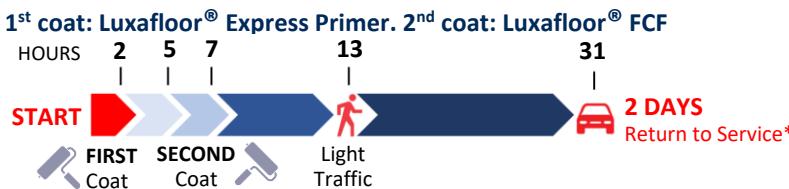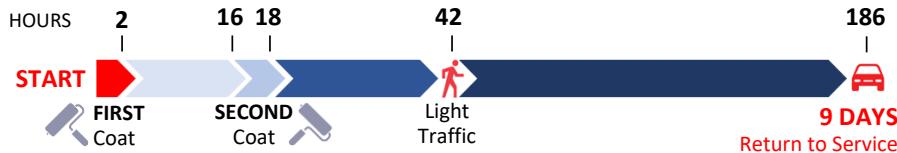

\*Comparison at 25°C and 50% relative humidity. Total service time will vary. Application time has been calculated at 2 hours. Timeline is based on continuous work.

[www.duluxprotectivecoatings.com.au](http://www.duluxprotectivecoatings.com.au)

® Dulux and Luxafloor are registered trade marks of DuluxGroup (Australia) Pty Ltd. DuluxGroup (Australia) Pty Ltd (ABN 67 000 049 427) 1956 Dandenong Road, Clayton, 3168, Australia. DuluxGroup (New Zealand) Pty Ltd (ABN 55 133 404 118) 150 Hutt Park Road, Lower Hutt, 5010 New Zealand.  
© Dulux Protective Coatings GXIX.

