


PRODUCT FACT SHEET

Dulux[®]
PROTECTIVE COATINGS

DULUX[®] DUREBILD[®] STE

The Surface Tolerant Epoxy

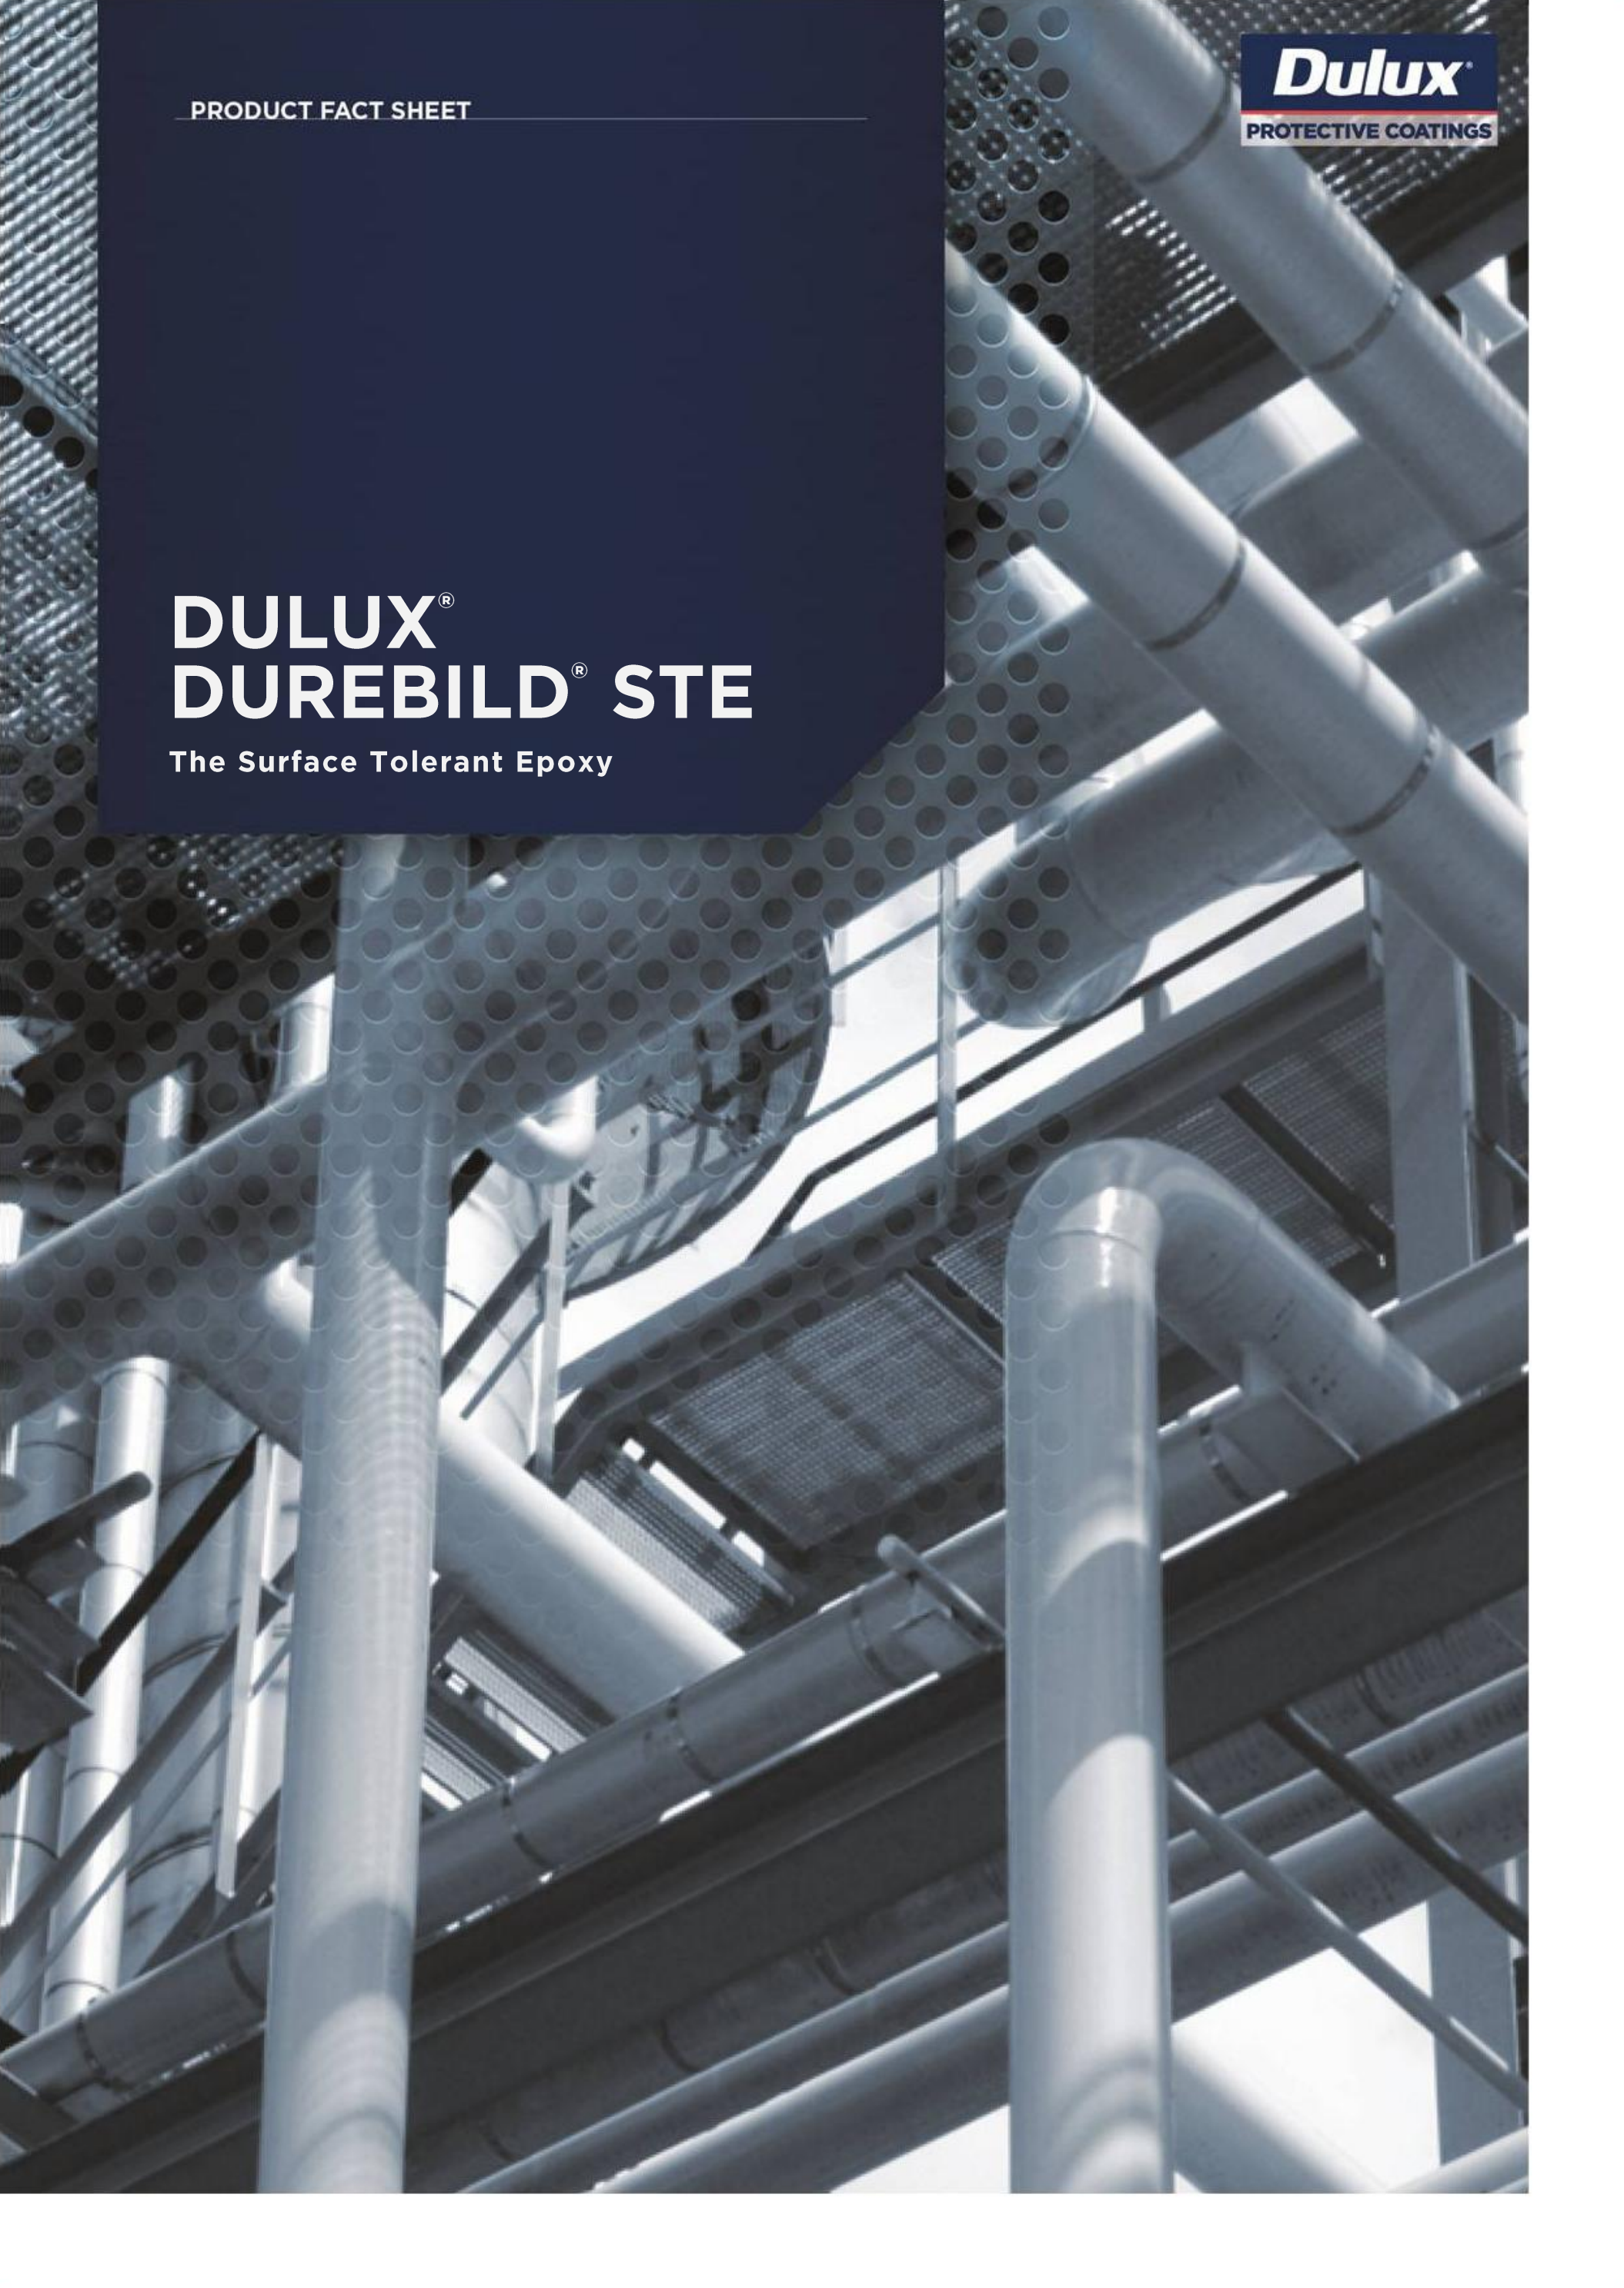

DULUX® DUREBILD® STE

Durebild® STE is a versatile, two-pack, high-solids surface-tolerant epoxy. Excellent universal tie-coat over painted surfaces, concrete floors, or as a spot-primer and intermediate over power tool cleaned steel. The high build characteristics allow higher film builds in fewer coats, saving time and money. Available in most colours and MIO, and with a Cold Cure Hardener for lower temperature work, Durebild® STE is the maintenance coating of choice.

USES

A versatile primer/finish on internal concrete floors, steelwork and many other areas. On external areas subject to UV, Durebild® STE is an excellent intermediate coat for two pack topcoats.

Durebild® STE is ideal for the maintenance of all painted substrates, especially steel, due to exceptional wetting and adhesion properties, especially where surface preparation is limited to power tool cleaning. Durebild® STE offers outstanding barrier protection against corrosive salts and moisture.

FEATURES

- Surface Tolerant – tenacious adhesion to most substrates
- Suitable for immersion or splash zone on off-shore structures
- High solids and high build formulation
- Cold Cure hardener available
- Chemical resistant

BENEFITS

- Cold Cure Hardener allows year round use
- High durability offers lower maintenance

PERFORMANCE GUIDE

Weatherability	Will chalk on UV exposure
Heat Resistance	Up to 120°C dry heat
Water Resistance	Outstanding resistance to immersion
Abrasion Resistance	Excellent
Solvent Resistance	Resists most solvents
Acid Resistance	Good
Alkali Resistance	Excellent
Salt Resistance	Excellent
Standards & Tests	APAS 2977, AS/NZ 3750.1

APPLICATION

Spray, brush and roller

